
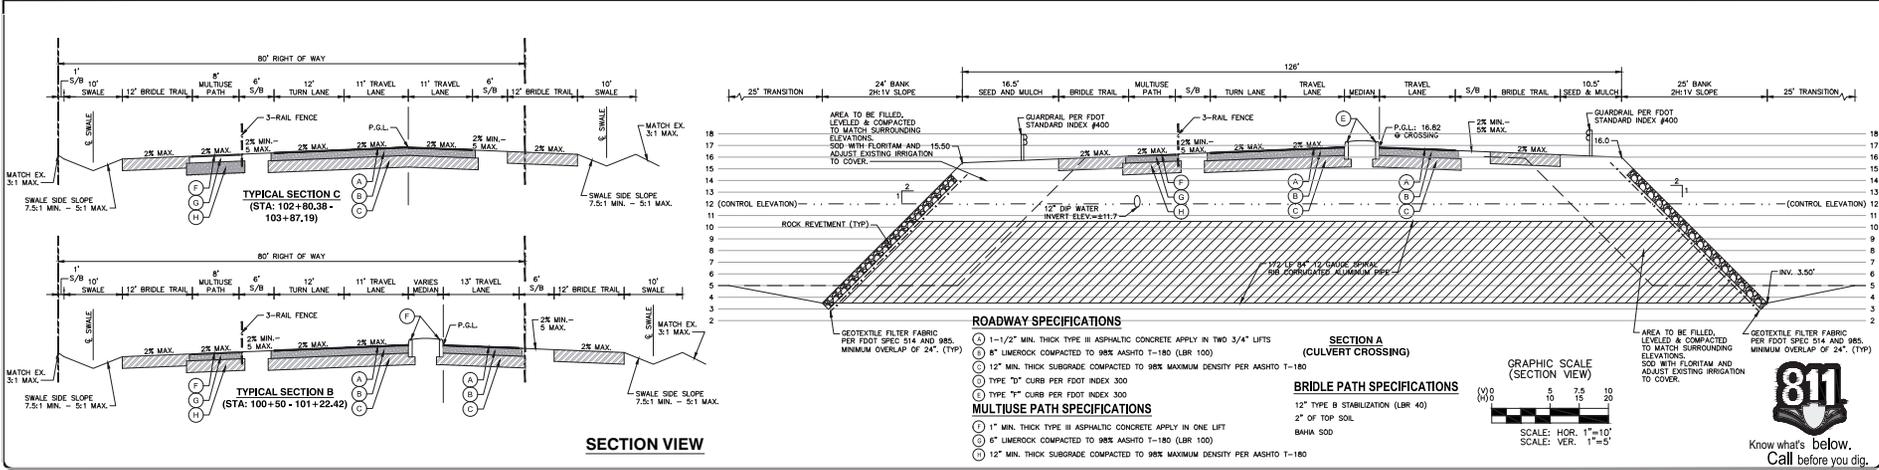


BID SET
APRIL 7, 2014

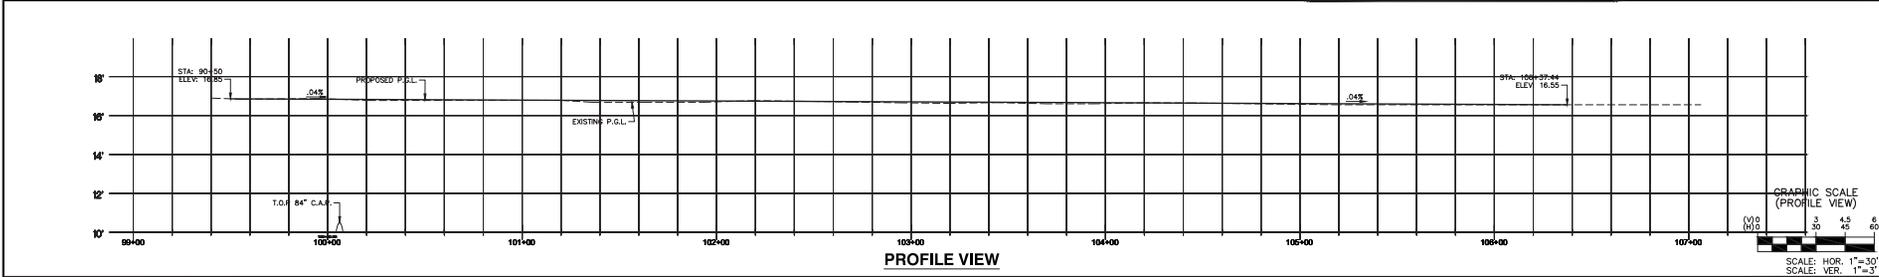

- ROADWAY SPECIFICATIONS**
- ① 1-1/2" MIN. THICK TYPE III ASPHALTIC CONCRETE APPLY IN TWO 3/4" LIFTS
 - ② 8" LIMEROCK COMPACTED TO 98% ASHTO T-180 (LBR 100)
 - ③ 12" MIN. THICK SUBGRADE COMPACTED TO 98% MAXIMUM DENSITY PER ASHTO T-180
 - ④ TYPE 1" CURB PER FDOT INDEX 300
 - ⑤ TYPE 1" CURB PER FDOT INDEX 300
- MULTIUSE PATH SPECIFICATIONS**
- ① 1" MIN. THICK TYPE III ASPHALTIC CONCRETE APPLY IN ONE LIFT
 - ② 2" OF TOP SOIL
 - ③ 6" LIMEROCK COMPACTED TO 98% ASHTO T-180 (LBR 100)
 - ④ 12" MIN. THICK SUBGRADE COMPACTED TO 98% MAXIMUM DENSITY PER ASHTO T-180
- BRIDLE PATH SPECIFICATIONS**
- ① 12" TYPE B STABILIZATION (LBR 40)
 - ② 2" OF TOP SOIL
 - ③ BHAH SOD
- SECTION A (CULVERT CROSSING)**
- AREA TO BE FILLED, LEVELED & COMPACTED TO MATCH SURROUNDING ELEVATIONS. SEE WITH FLORITAM AND ADJUST EXISTING IRRIGATION TO COVER.
- AREA TO BE FILLED, LEVELED & COMPACTED TO MATCH SURROUNDING ELEVATIONS. SEE WITH FLORITAM AND ADJUST EXISTING IRRIGATION TO COVER.

NO.	DATE	REVISIONS	BY

WELLINGTON
C-23 MULTIUSE PATH
OPTION #3

WELLINGTON
Engineering Department
12200 Forest Hill Boulevard, Wellington, Florida 33414

DATE: 04-25-2013
DRAWN: JRR
PROJECT: C-23 MULTIUSE PATH, ROW AVAILABILITY STUDY
CHECKED: JRR
MANAGER: BR
DESK: BR

811
Know what's below.
Call before you dig.

8C
12
JOB NO. #013-14/DZ